


## Overview

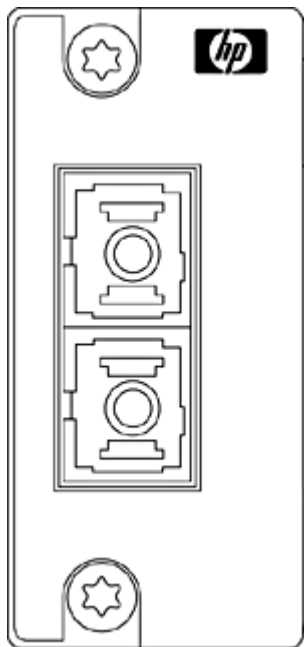

HP X119 100M PC SC FX Transceiver

---

## Models

HP X119 100M PC SC FX Transceiver

J4853A

### Technical Specifications

<b>HP X119 100M PC SC FX Ports Transceiver (J4853A)</b>	<b>Physical characteristics</b>	1 SC 100BASE-FX port (IEEE 802.3u Type 100BASE-FX); Duplex: half or full Dimensions: 3.8(d) x 2.05(w) x 0.95(h) in. (9.65 x 5.21 x 2.41 cm) Weight: 0.09 lb. (0.04 kg)
<b>HP X119 100M PC SC FX Transceiver: An HP format 100-megabit transceiver with SC connectors using FX technology.</b>	<b>Cabling</b>	Type: <ul style="list-style-type: none"><li>• 62.5/125 <math>\mu\text{m}</math> or 50/125 <math>\mu\text{m}</math> (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively</li></ul> Maximum distance: <ul style="list-style-type: none"><li>• 2 km (full duplex) or 412 m (half duplex)</li></ul>
	<b>Notes</b>	Full duplex only, when installed in unmanaged switches and HP E2500 Switch Series
	<b>Services</b>	Refer to the HP website at <a href="http://www.hp.com/networking/services">www.hp.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

To learn more, visit [www.hp.com/networking](http://www.hp.com/networking)

© Copyright 2011 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

